

RADIANT HONOR

RADIANT HONOR



RADIANT HONOR



2026



RADIANT HONOR

Address: 9th Floor, Building 1, No.188 Kaiyuan Avenue, Luogang, HuangPu, Guangzhou, 510530, Guangdong, China



Lisa WhatsApp



Jerry Whatsapp

RADIANT HONOR



Company Introduction

RADIANT HONOR Industrial Co., Ltd, established in 2013, is a leading Chinese manufacturer specializing in outdoor LED lighting solutions for architectural and landscaping projects. We offer a comprehensive range of outdoor luminaires, including High Power LED Flood Lights, Round and Square Spotlights, Inground Lights, and Pole-Mounted Spotlights. With over one hundred models available, there is a wide selection to choose which can be used to illuminate all your outdoor projects beautifully and efficiently.

RADIANT HONOR stands out with its unique and innovative approach. We design and manufacture our own lighting fixtures, and hold appearance patents for our entire product portfolio. All our luminaires are designed in-house using private molds, which makes our products that not only meets functional needs but also boasts a distinctive aesthetic. Furthermore, our commitment to quality is unmatched. RADIANT HONOR's Dedication to quality is further reinforced by our TUV CB CE & ErP certifications, guaranteeing superior safety and performance.

RADIANT HONOR is your trusted partner for all your architectural outdoor LED lighting needs. With over 10 years of experience, our team of engineers and technicians is dedicated to providing you with the best products and support. We've built long-term strategic partnerships with design companies, construction firms, engineering teams, and well-known lighting brands around the world. Our commitment to quality, innovation, and exceptional service ensures your success. Whether you're a lighting designer, architect, or contractor, RADIANT HONOR is your one-stop shop for all your architectural outdoor LED lighting needs



ILLUMINATE THE FUTRE

RADIANT HONOR



PRODUCT INDEX

LED Spot Lights A Series 03-04



LED Spot Lights G Series 05-10



LED Spot Lights D Series 11-20



LED Spot Lights V Series 21-26



LED Spot Lights W Series 27-37



LED Spot Lights P Series 38-44



PRODUCT INDEX

LED Spot Lights T Series 45-56



LED Spot Lights Q Series 57-68





PRODUCT INDEX

LED Roof Module-M5 69-70



LED Roof Module-M3 71





LED Circular Module 72




PRODUCT INDEX

LED Wall Washer 73-76

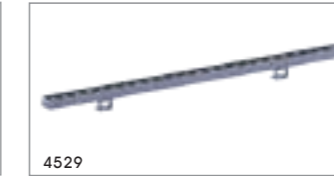


LED Linear Light 77-78



LED Inground Lights 79-84



RADIANT HONOR

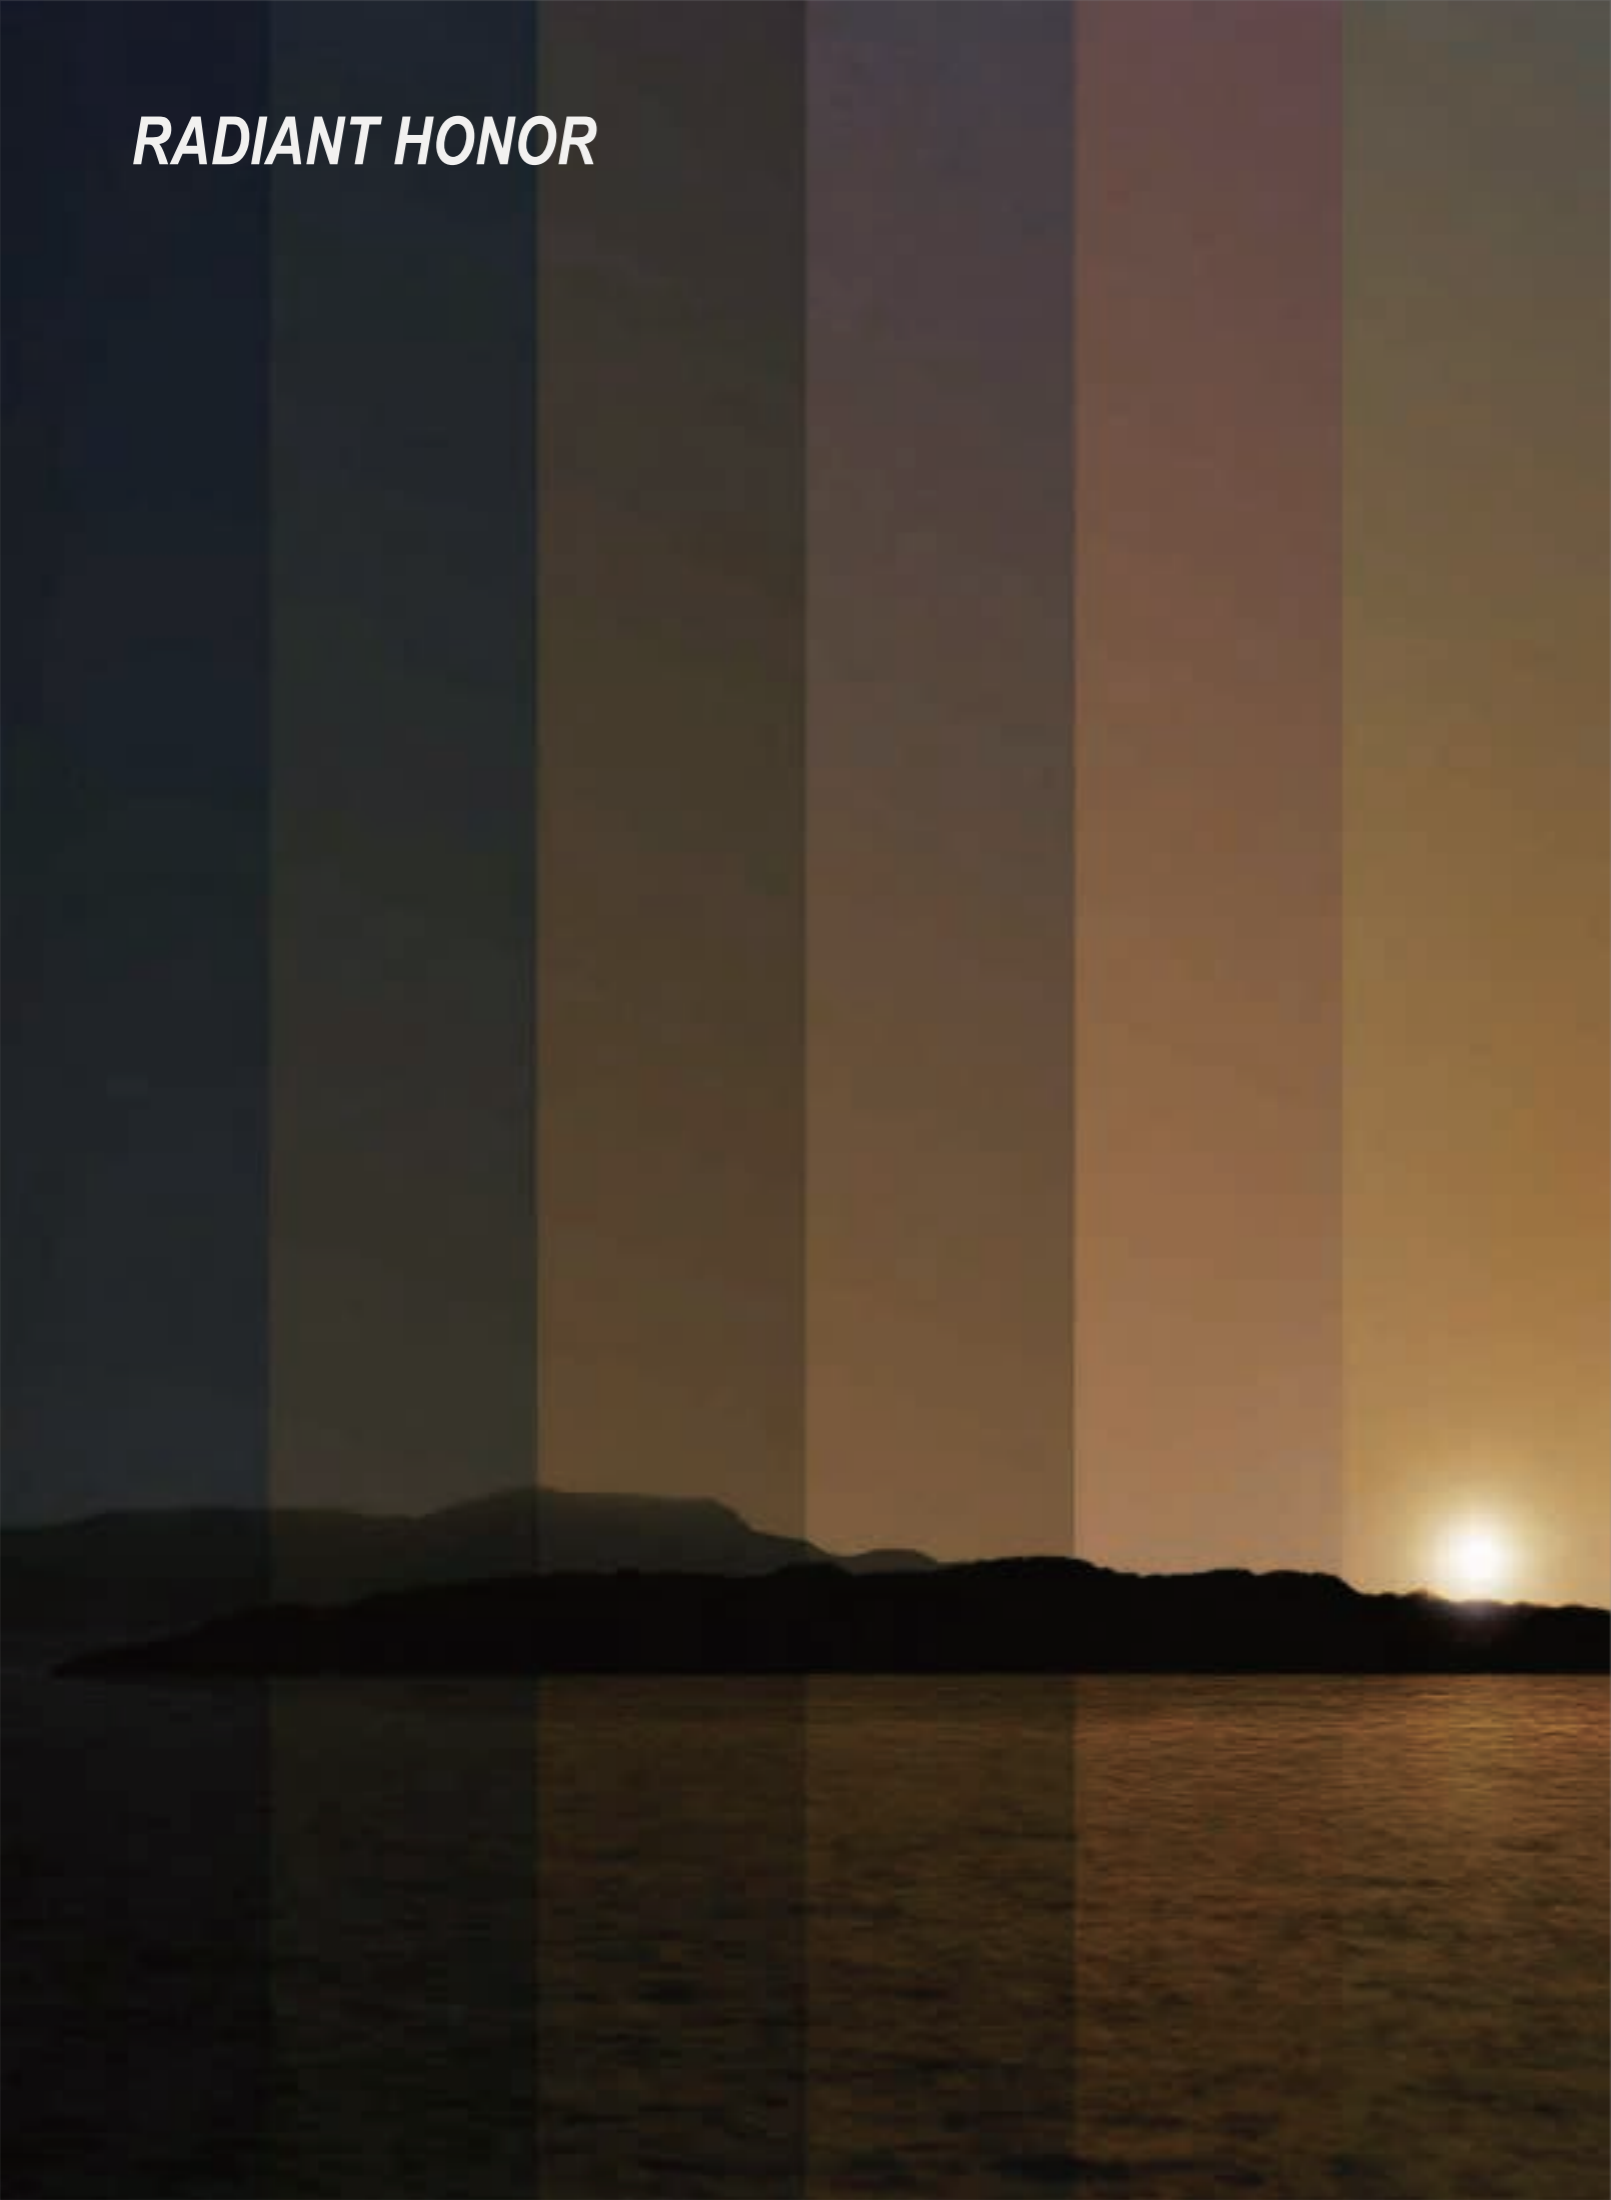




A45-A

A45-B


A45-C

A45-D

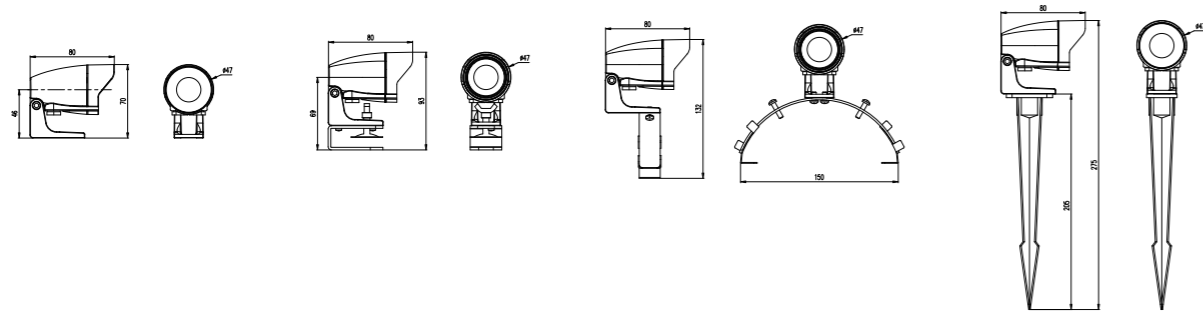

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V
 LED Qty: 1PC
 LED Brand: Cree, Lumileds, Osram
 Wattage: 3W (White), 5W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS




A65-A

A65-B



A65-C

A65-D

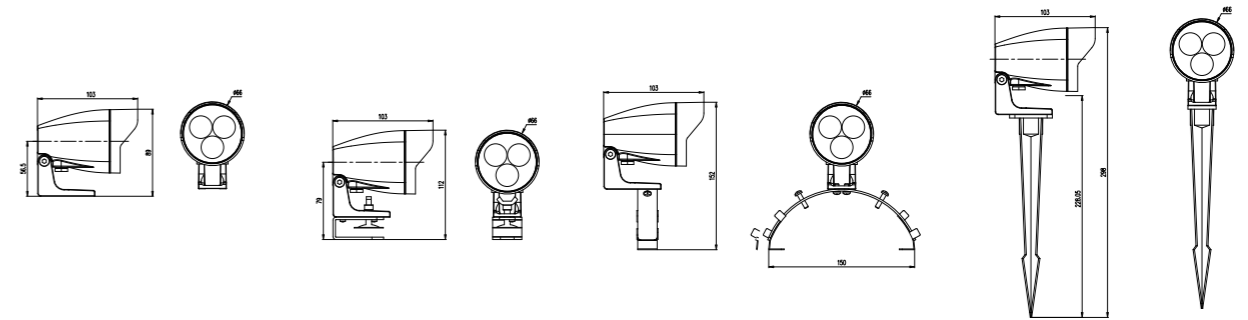


Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V
 LED Qty: 3PC
 LED Brand: Cree, Lumileds, Osram
 Wattage: 6W (White), 9W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS

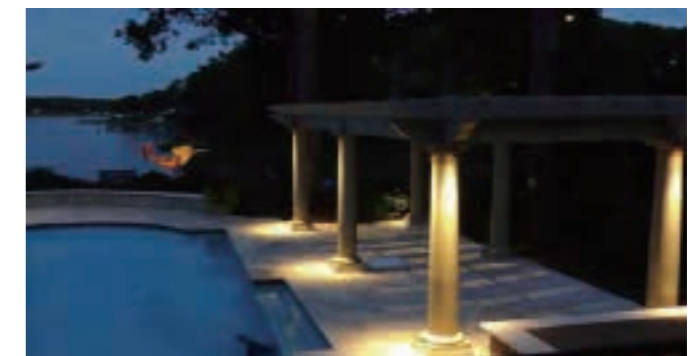




G85




G85Z

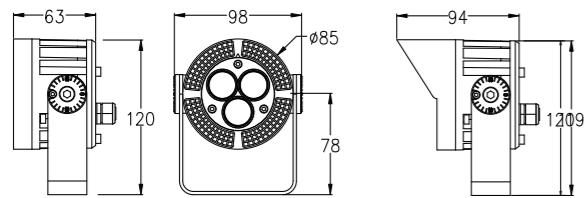


Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications


Voltage: DC24V/AC240V
 LED Qty: 3PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 9W (White), 9W/12W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS

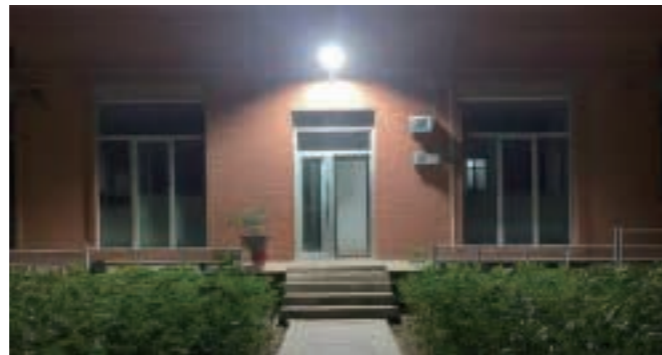

G110




G110Z

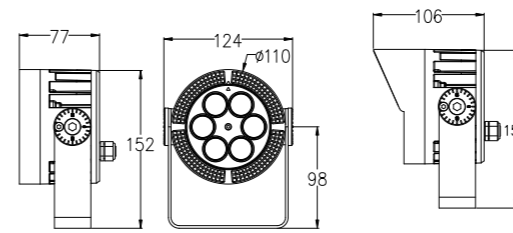

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 6PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 15W (White), 15W/18W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS






G130





G130Z

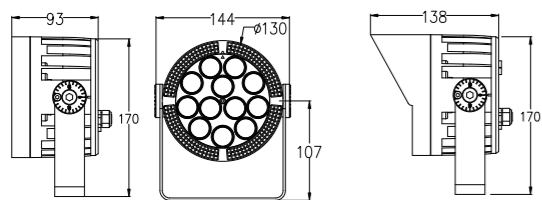

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications


Voltage: DC24V/AC240V
 LED Qty: 9PCS/12PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 18W/24W(White), 24W/36W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



G160




G160Z

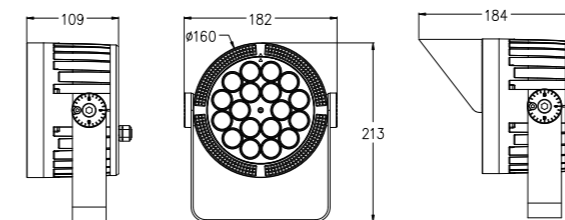

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 18PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 36W/48W(White), 48W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS






G180




G180Z

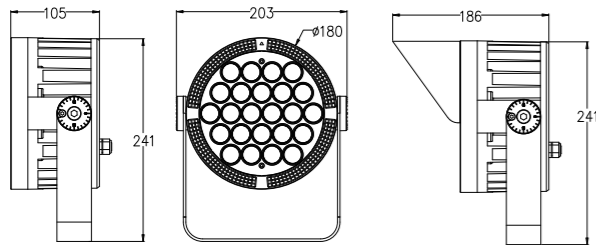

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications


Voltage: DC24V/AC240V
 LED Qty: 24PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 60W (White), 60W/72W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



G210





G210Z

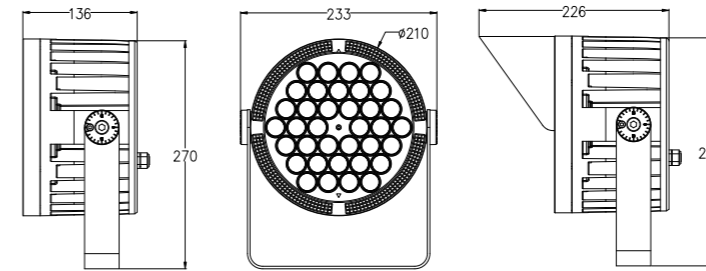

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 36PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 72W (White), 96W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS






D65





D65Z

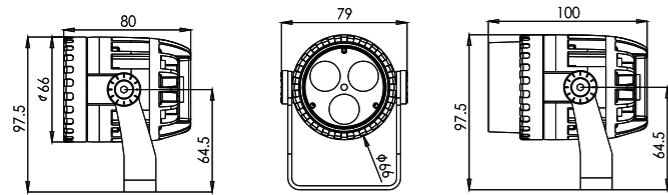

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications


Voltage: DC24V/AC240V
 LED Qty: 1PC/3PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 6W (White), 9W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



D65L





D65LZ

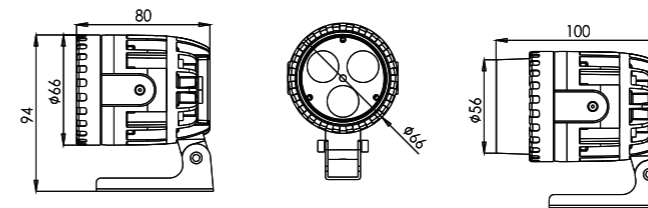

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 1PC/3PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 6W (White), 9W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS






D85





D85Z

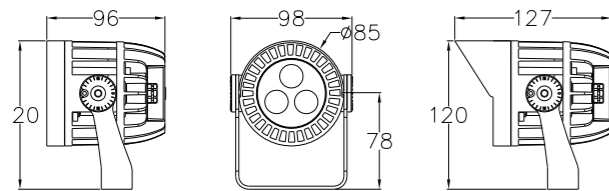

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications


Voltage: DC24V/AC240V
 LED Qty: 3PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 9W (White), 9W/12W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



D110





D110Z

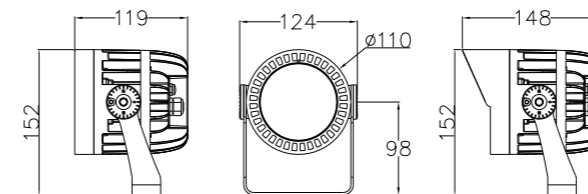

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 6PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 15W (White), 15W/18W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS






D130




D130Z

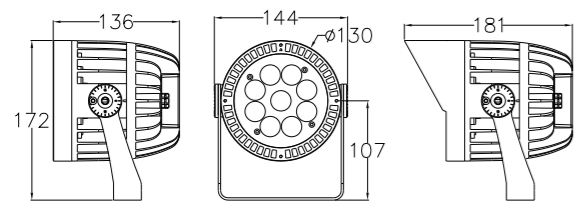

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications


Voltage: DC24V/AC240V
 LED Qty: 9PCS/12PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 18W/24W(White), 24W/36W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



D160




D160Z

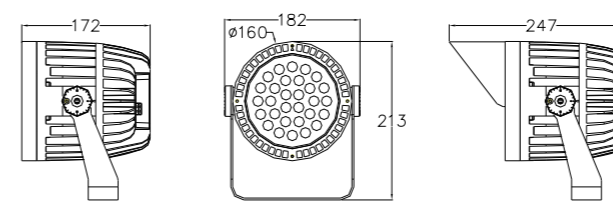

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 18PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 36W/48W(White), 48W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS






D180




D180Z

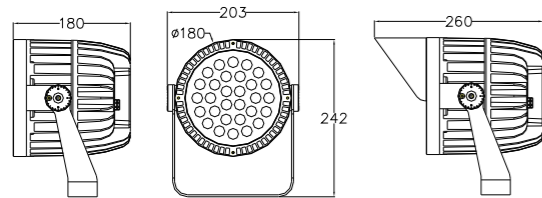

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications


Voltage: DC24V/AC240V
 LED Qty: 24PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 60W (White), 60W/72W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



D210




D210Z

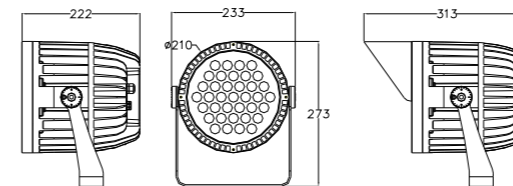


Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 36PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 72W (White), 96W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS

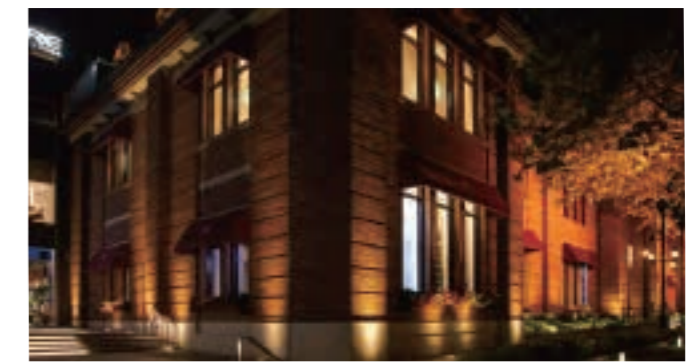




D230




D230Z

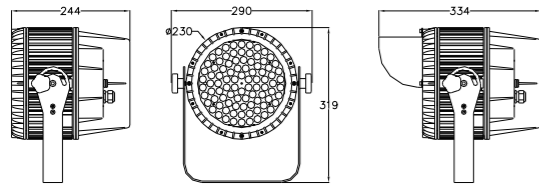

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection




Specifications


Voltage: DC24V/AC240V
 LED Qty: 48PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 120W (White), 120W/150W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



DMX Wiring A

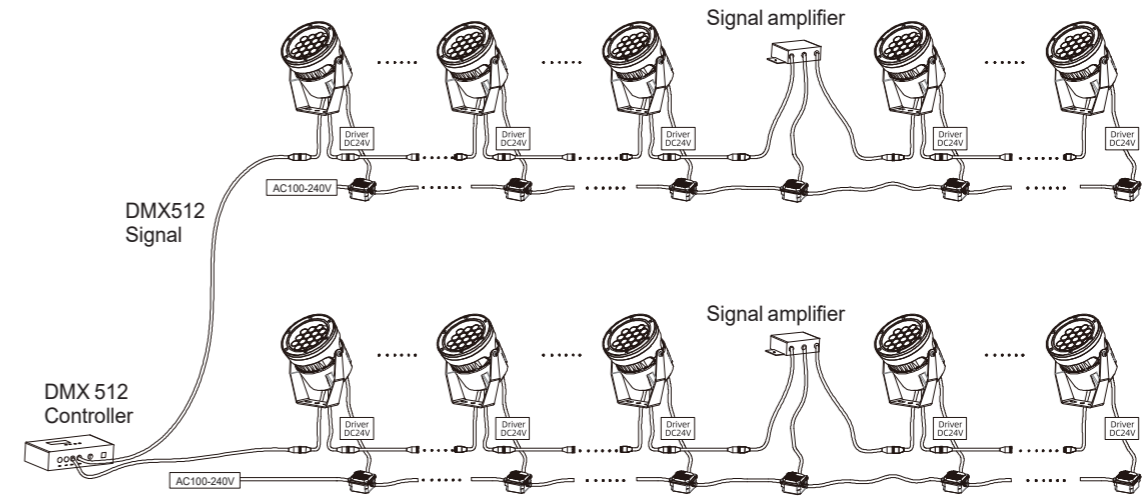

DMX Wiring B

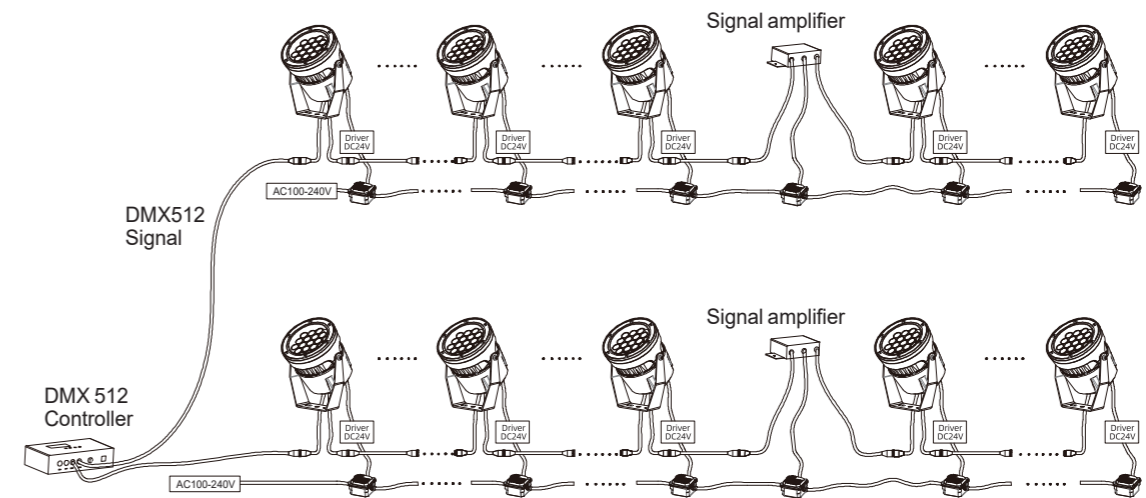

Single Color Wiring



RADIANT HONOR






V260




V260Z

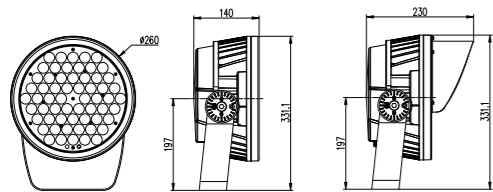

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection




Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension	
V260	120W	DC24V AC240V	3°/10°/15°/20° 30°/45°/60°	White	18/28/ 48/60PCS	ON/OFF DMX	Ø260*W140mm	
	150W			RGB/RGBW				
V260Z	120W			White				Ø260*W230mm
	150W			RGB/RGBW				



V300




V300Z

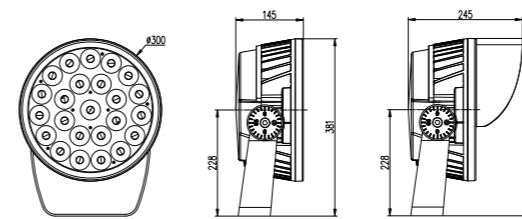

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection




Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension	
V300	150W	DC24V AC240V	3°/10°/15°/20° 30°/45°/60°	White	24/36/ 60/72PCS	ON/OFF DMX	Ø300*W145mm	
	200W			RGB/RGBW				
V300Z	150W			White				Ø300*W245mm
	200W			RGB/RGBW				



V370



V370Z

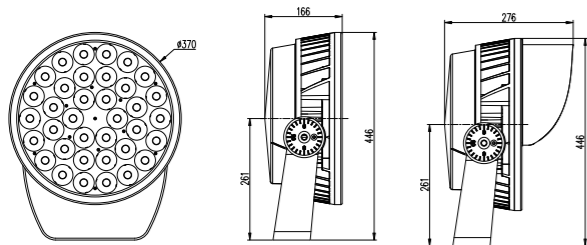

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection




Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension
V370	200W	DC24V AC240V	3°/10°/15°/20° 30°/45°/60°	White	36/56/ 72/96PCS	ON/OFF DMX	Ø370*W166mm
	240W			RGB/RGBW			
V370Z	200W			White			
	240W			RGB/RGBW			



V420




V420Z

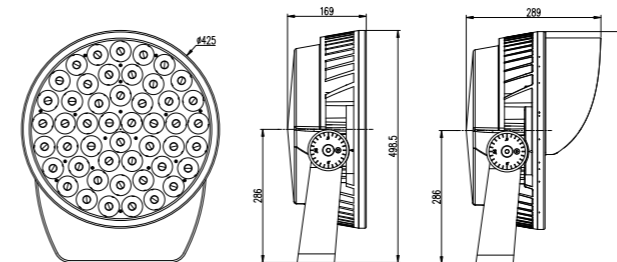

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension
V420	240W	DC24V AC240V	3°/10°/15°/20° 30°/45°/60°	White	48/80/ 96/112PCS	ON/OFF DMX	Ø420*W170mm
	320W			RGB/RGBW			
V420Z	240W			White			
	320W			RGB/RGBW			

RADIANT HONOR




Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 1PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 3W (White), 5W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS

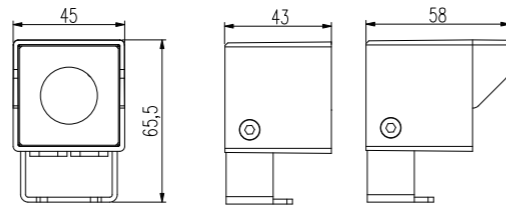

W45





W45Z



W65Z



W65

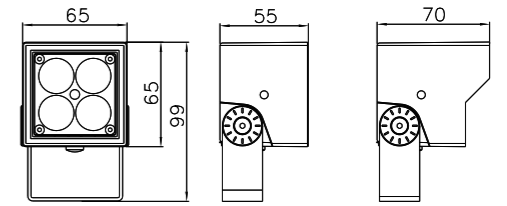


Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection

Specifications

Voltage: DC24V/AC240V
 LED Qty: 4PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 6W (White), 9W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS

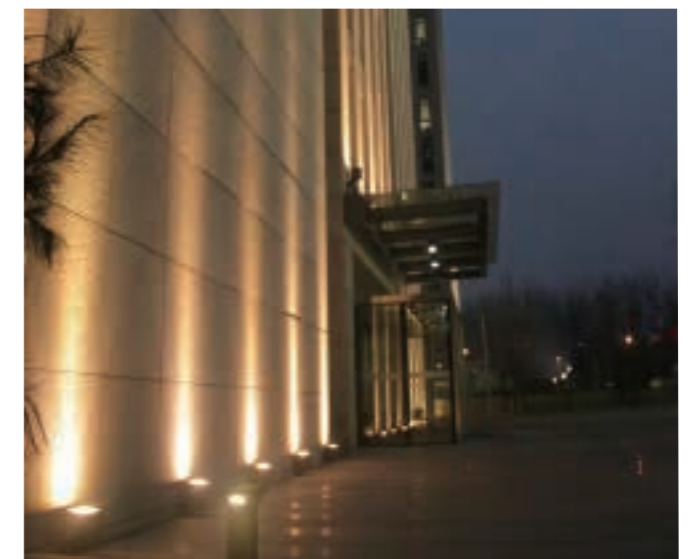


Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 5PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 12W (White), 12W/15W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS

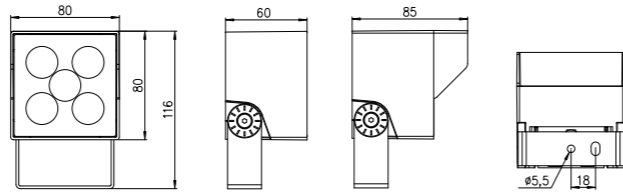

W80






W80Z



W105



W105Z

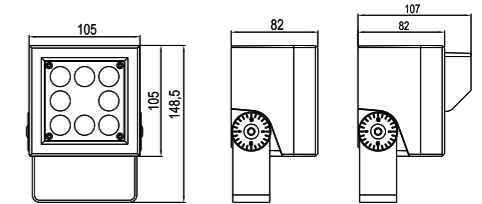

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection


Specifications

Voltage: DC24V/AC240V
 LED Qty: 8PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 15W/18W (White), 18W/24W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS




Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 12PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 24W (White), 36W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS

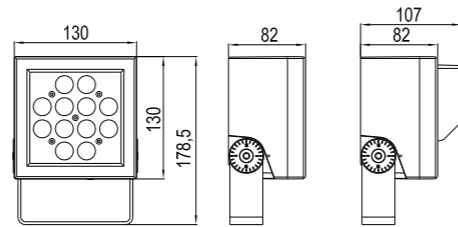

W130





W130Z



W160



W160Z

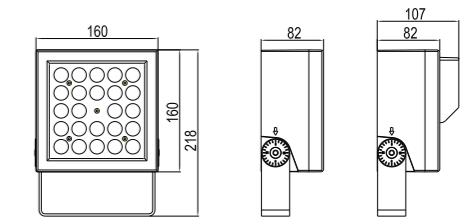

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 12PCS/16PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 36W (White), 48W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection

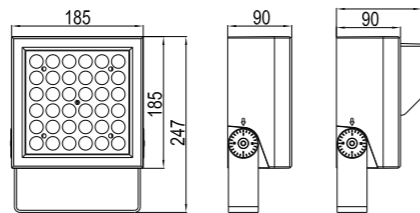

W185



W185Z

Specifications



Voltage: DC24V/AC240V
 LED Qty: 24PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 48W (White), 60W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



W220



W220Z

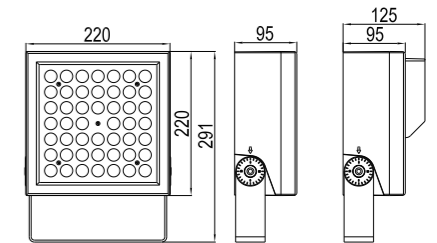

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection

Specifications

Voltage: DC24V/AC240V
 LED Qty: 24PCS/36PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 60W/72WW (White), 72W/96W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS






LED Spot Lights W Series


Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 48PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 96W (White), 120W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS

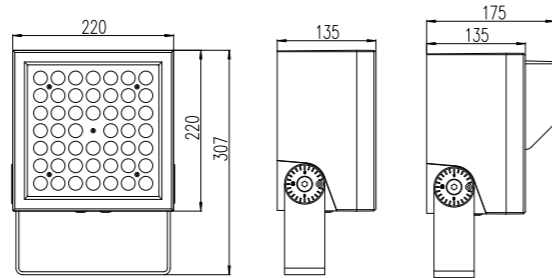

W220L



W220LZ



LED Spot Lights P Series



RADIANT HONOR



LED Spot Lights P Series



W380P



W380PZ

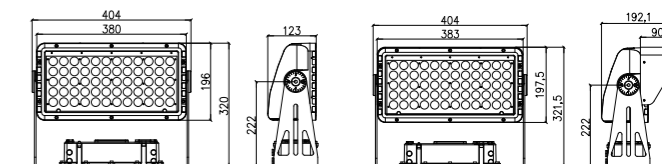

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection


Specifications

Voltage: DC24V/AC240V
 LED Qty: 60PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 150W (White), 200W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection

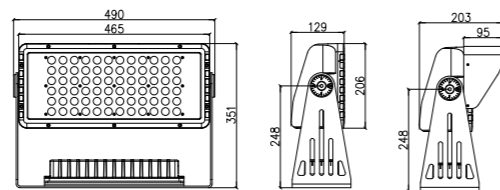

W465P



W465PZ

Specifications




Voltage: DC24V/AC240V
 LED Qty: 72PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 200W (White), 240W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



W615P



W615PZ

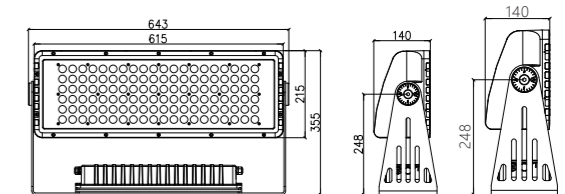

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection

Specifications

Voltage: DC24V/AC240V
 LED Qty: 112PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 300W (White), 360W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS




Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 144PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 400W (White), 480W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS

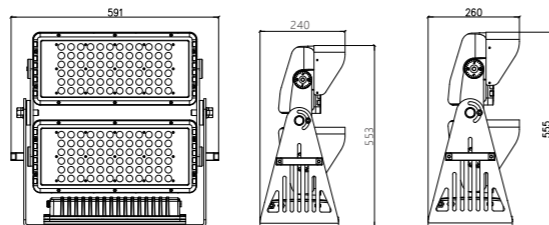

W465DP





W465DPZ



W615DPZ

W615DP

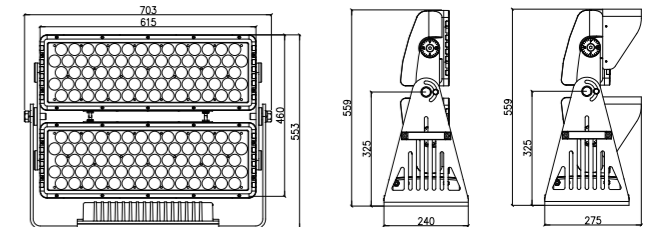


Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection

Specifications

Voltage: DC24V/AC240V
 LED Qty: 182PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 600W (White), 720W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS

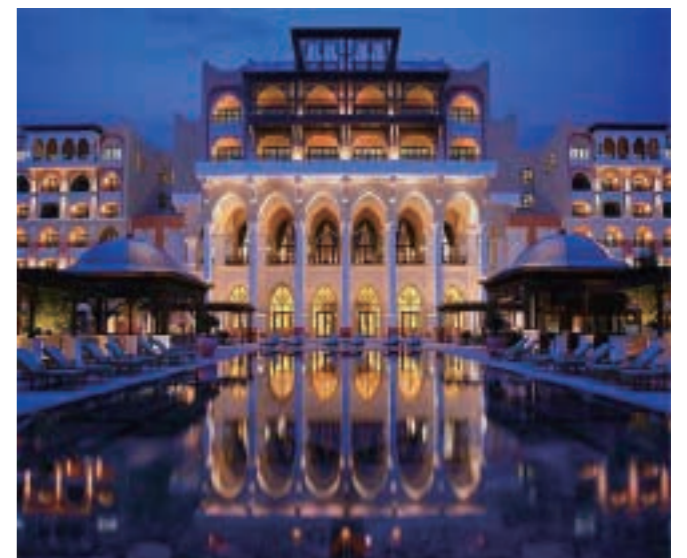

RADIANT HONOR



LED Spot Lights T Series







LED Spot Lights T Series



T65 (SMD)





T65 (COB)

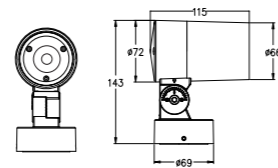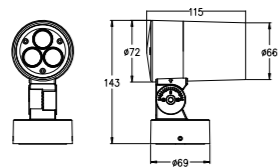

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Various optics light distribution
- Versatile installation options



Specifications

Voltage: DC24V/AC240V
 LED Qty: 1PCS COB/3PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 9W (White), 9W~15W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS





LED Spot Lights T Series



T85 (SMD)





T85 (COB)

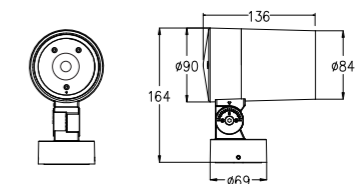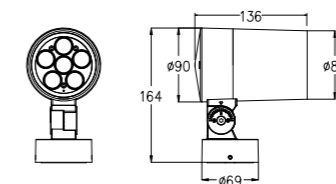

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Various optics light distribution
- Versatile installation options



Specifications

Voltage: DC24V/AC240V
 LED Qty: 1PCS COB/5PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 15W~18W (white), 18W~24W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS







LED Spot Lights T Series



T100 (SMD)





T100 (COB)

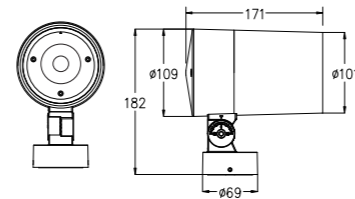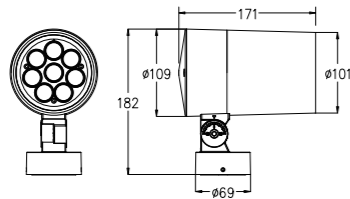


Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Various optics light distribution
- Versatile installation options



Specifications

Voltage: DC24V/AC240V
 LED Qty: 1PCS COB/8PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 24W (White), 24W~36W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS

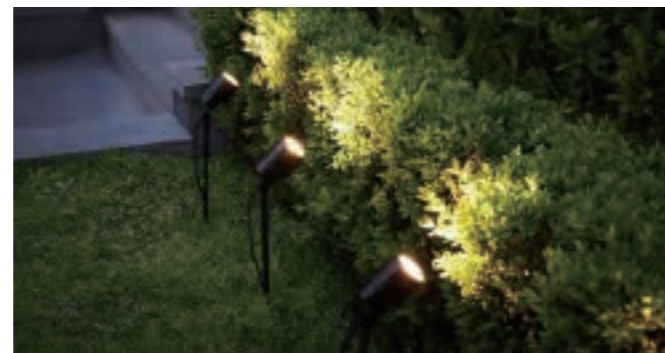

T60-T100 Installation



Type-B Stand



Type-C Spike



Type-H Spike



Type-A Base



Type-D Wall Mount



Type-E Pole Mount



Type-G Strap



Type-L H Bracket







T120 (SMD)





T120 (COB)

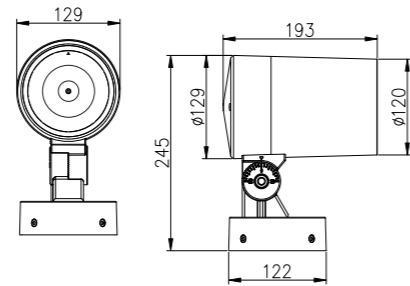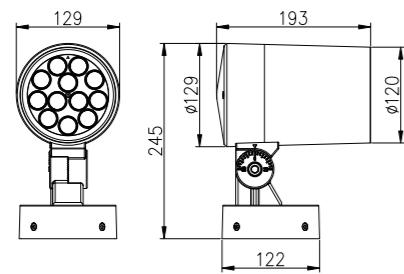

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Various optics light distribution
- Versatile installation options



Specifications



Voltage: DC24V/AC240V
 LED Qty: 1PCS COB/12PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 36W (White), 36W~48W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



T40 (SMD)





T140 (COB)

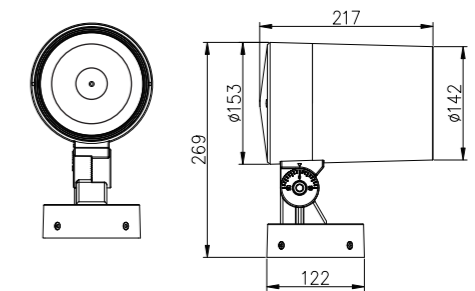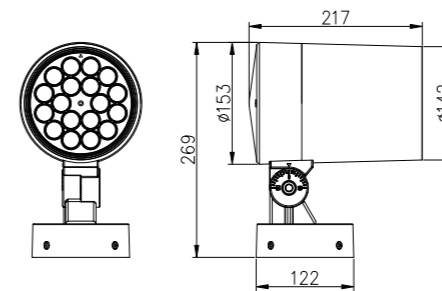

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Various optics light distribution
- Versatile installation options



Specifications

Voltage: DC24V/AC240V
 LED Qty: 1PCS COB/18PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 48W (White), 48W~60W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS







LED Spot Lights T Series



T160 (SMD)





T160 (COB)

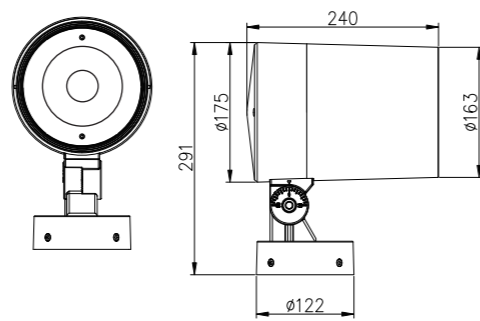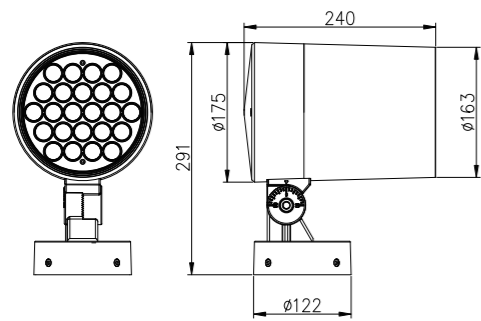

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Various optics light distribution
- Versatile installation options



Specifications

Voltage: DC24V/AC240V
 LED Qty: 1PCS COB/24PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 60W~72W (White), 60W~80W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS





LED Spot Lights T Series



T200 (SMD)





T200 (COB)

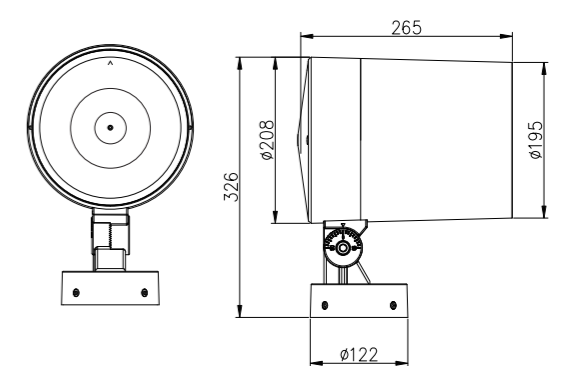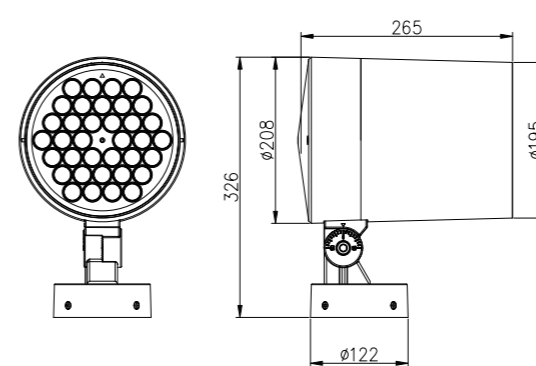


Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Various optics light distribution
- Versatile installation options




Specifications

Voltage: DC24V/AC240V
 LED Qty: 1PCS COB/36PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 80W~96W (White), 96W~120W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



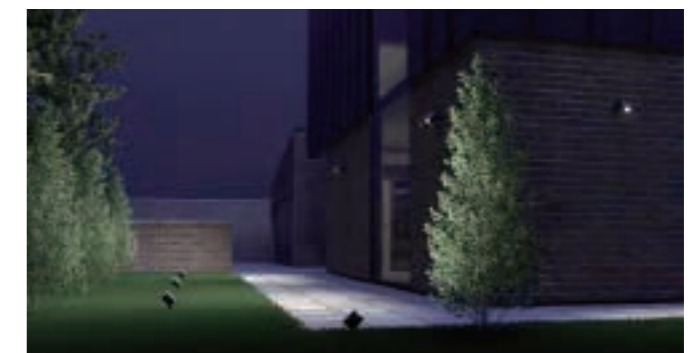




T120-T200 Installation

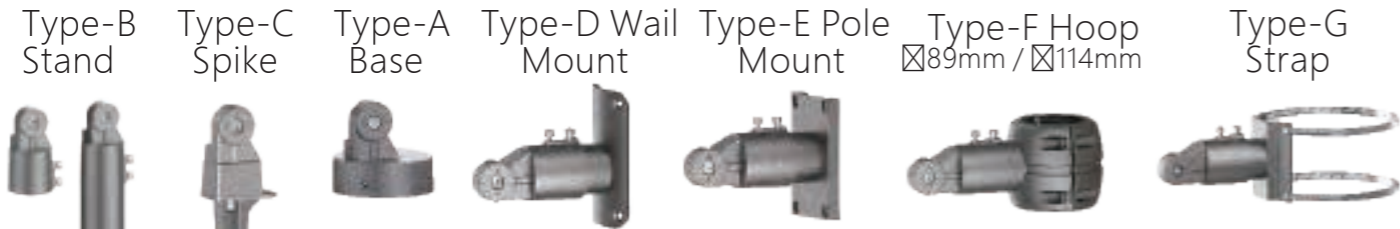

Anti-glare Louvers

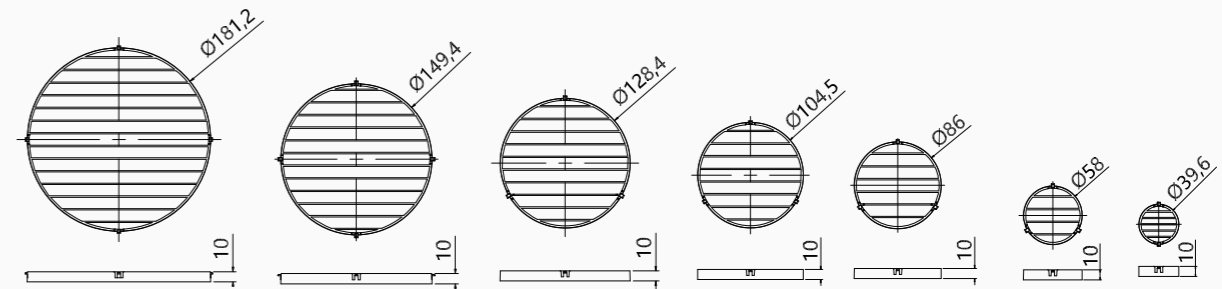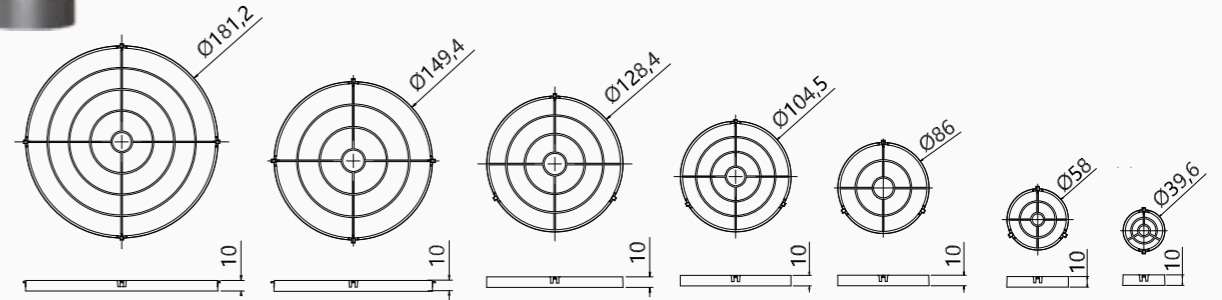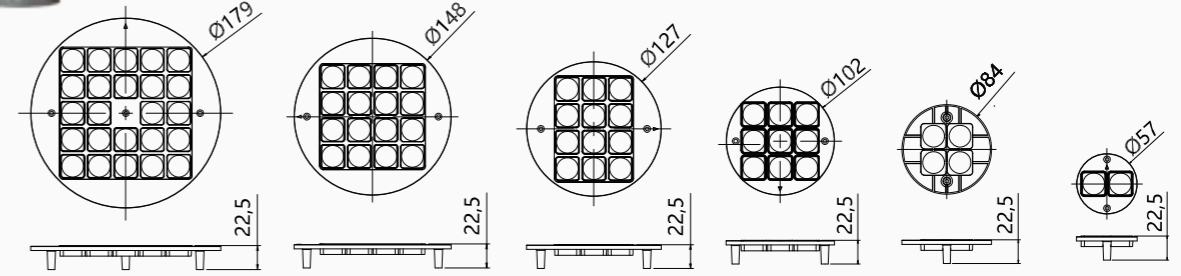

RADIANT HONOR






LED Spot Lights Q Series Base Model



Q200

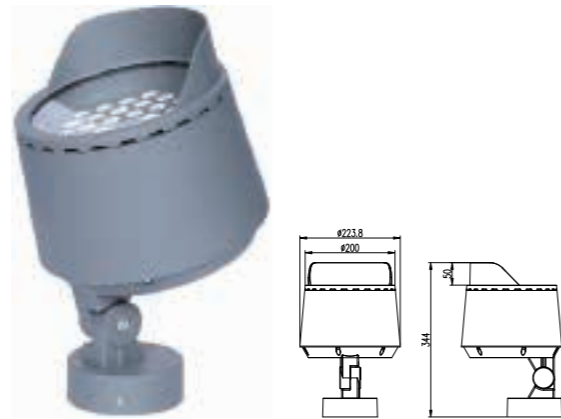

Q200Z



Q135



Q155




Q175



Q220



Q265



Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension
Q135	24W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	8/9PCS	ON/OFF DMX	Ø133*H235mm
	36W			RGB/RGBW			
Q155	36W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	8/12PCS	ON/OFF DMX	Ø155*H267mm
	48W			RGB/RGBW			
Q175	48W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	10/18PCS	ON/OFF DMX	Ø175*H277mm
	60W			RGB/RGBW			
Q200	60W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	10/24PCS	ON/OFF DMX	Ø200*H294mm
	72W			RGB/RGBW			
Q220	72W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	16/36PCS	ON/OFF DMX	Ø220*H304mm
	96W			RGB/RGBW			
Q265	120W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	48/60PCS	ON/OFF DMX	Ø265*H338mm
	150W			RGB/RGBW			



LED Spot Lights Q Series Spike Model



Q200



Q200Z



Q135S



Q155S





Q175S




Q220S




Q265S



Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension
Q135S	24W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	8/9PCS	ON/OFF DMX	Ø134*H541mm
	36W			RGB/RGBW			
Q155S	36W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	8/12PCS	ON/OFF DMX	Ø155*H589mm
	48W			RGB/RGBW			
Q175S	48W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	10/18PCS	ON/OFF DMX	Ø175*H610mm
	60W			RGB/RGBW			
Q200S	60W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	10/24PCS	ON/OFF DMX	Ø200*H636mm
	72W			RGB/RGBW			
Q220S	72W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	16/36PCS	ON/OFF DMX	Ø220*H709mm
	96W			RGB/RGBW			
Q265S	120W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	48/60PCS	ON/OFF DMX	Ø265*H747mm
	150W			RGB/RGBW			

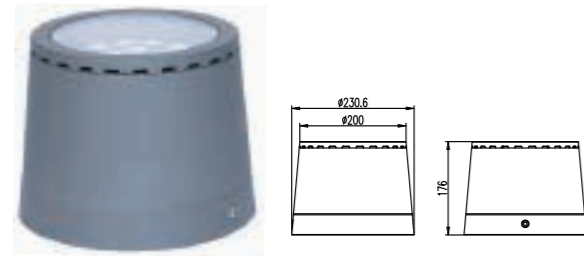

Q200G

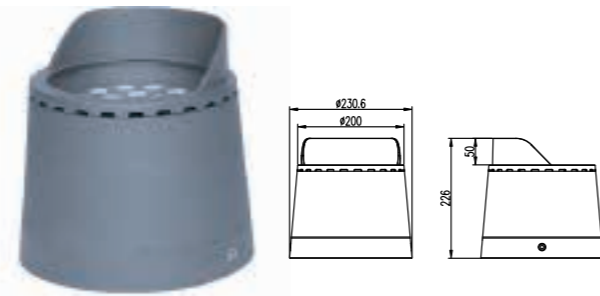

Q200GZ

0.3528



Q155G





Q175G



Q220G




Q265G



Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension
Q155G	36W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	8/12PCS	ON/OFF DMX	Ø155*H141mm
	48W			RGB/RGBW			
Q175G	48W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	10/18PCS	ON/OFF DMX	Ø175*H156mm
	60W			RGB/RGBW			
Q200G	60W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	10/24PCS	ON/OFF DMX	Ø200*H176mm
	72W			RGB/RGBW			
Q220G	72W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	16/36PCS	ON/OFF DMX	Ø220*H188mm
	96W			RGB/RGBW			
Q265G	120W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	48/60PCS	ON/OFF DMX	Ø265*H222mm
	150W			RGB/RGBW			



Q200D

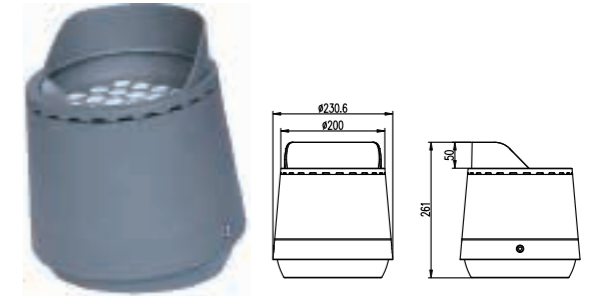

Q200DZ



Q155D





Q175D



Q220D




Q265D




Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension
Q155D	36W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	8/12PCS	ON/OFF DMX	Ø155*H171mm
	48W			RGB/RGBW			
Q175D	48W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	10/18PCS	ON/OFF DMX	Ø175*H190mm
	60W			RGB/RGBW			
Q200D	60W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	10/24PCS	ON/OFF DMX	Ø200*H211mm
	72W			RGB/RGBW			
Q220D	72W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	16/36PCS	ON/OFF DMX	Ø220*H225mm
	96W			RGB/RGBW			
Q265D	120W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	48/60PCS	ON/OFF DMX	Ø265*H271mm
	150W			RGB/RGBW			



LED Spot LightsQ SeriesInground Model

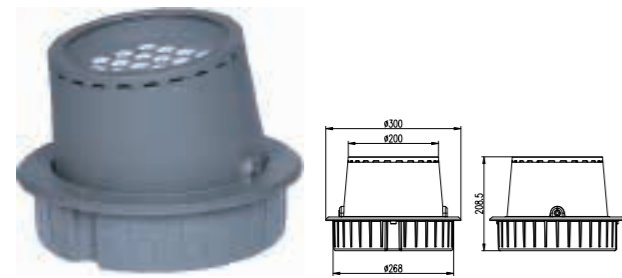

Q200U

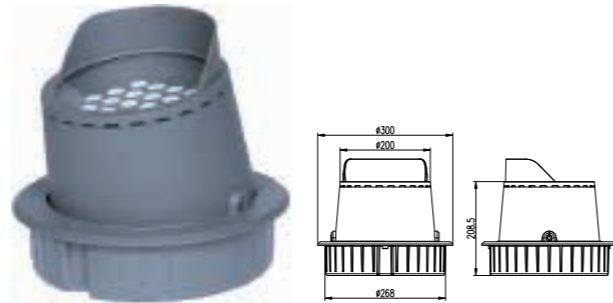

Q200UZ



Q155U





Q175U



Q220U



Q265U



Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension
Q135U	24W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	8/9PCS	ON/OFF DMX	Ø134*H150mm
	36W			RGB/RGBW			
Q155U	36W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	8/12PCS	ON/OFF DMX	Ø155*H172mm
	48W			RGB/RGBW			
Q175U	48W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	10/18PCS	ON/OFF DMX	Ø175*H184mm
	60W			RGB/RGBW			
Q200U	60W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	10/24PCS	ON/OFF DMX	Ø200*H208mm
	72W			RGB/RGBW			
Q220U	72W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	16/36PCS	ON/OFF DMX	Ø220*H224mm
	96W			RGB/RGBW			
Q265U	120W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	48/60PCS	ON/OFF DMX	Ø265*H268mm
	150W			RGB/RGBW			



LED Spot LightsQ SeriesPole Model



Q200P



Q200PZ



Q135P



Q155P




Q175P



Q220P



Q265P




Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension
Q135P	24W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	8/9PCS	ON/OFF DMX	Ø134*H412mm
	36W			RGB/RGBW			
Q155P	36W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	8/12PCS	ON/OFF DMX	Ø155*H443mm
	48W			RGB/RGBW			
Q175P	48W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	10/18PCS	ON/OFF DMX	Ø175*H453mm
	60W			RGB/RGBW			
Q200P	60W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	10/24PCS	ON/OFF DMX	Ø200*H470mm
	72W			RGB/RGBW			
Q220P	72W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	16/36PCS	ON/OFF DMX	Ø220*H480mm
	96W			RGB/RGBW			
Q265P	120W	DC24V AC240V	4°/10°/15°/30° /45°/60°	White	48/60PCS	ON/OFF DMX	Ø265*H514mm
	150W			RGB/RGBW			

RADIANT HONOR



RADIANT HONOR

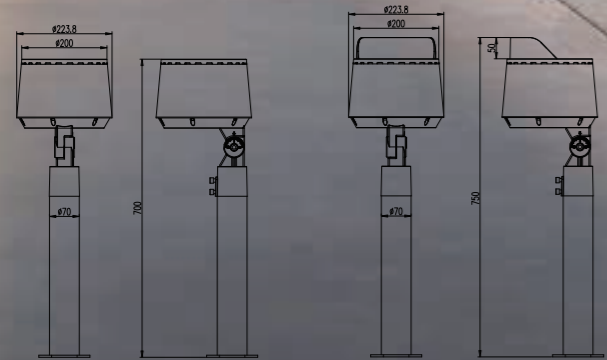

LED Spot Lights Q Series Column Model



RADIANT HONOR






LED Roof Module-M5



M5L


M5U

M5C

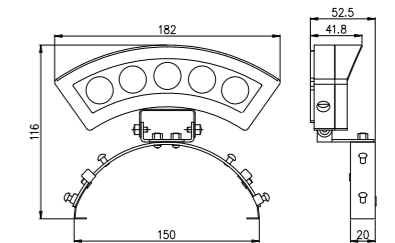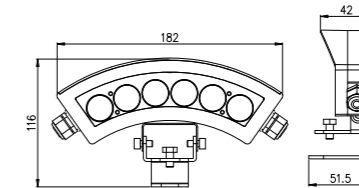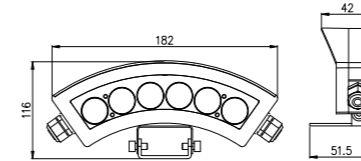

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection




Specifications

Voltage: DC24V/AC240V
 LED Qty: 6PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 6W/9W/12W (White), 9W/12W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS






LED Roof Module-M3

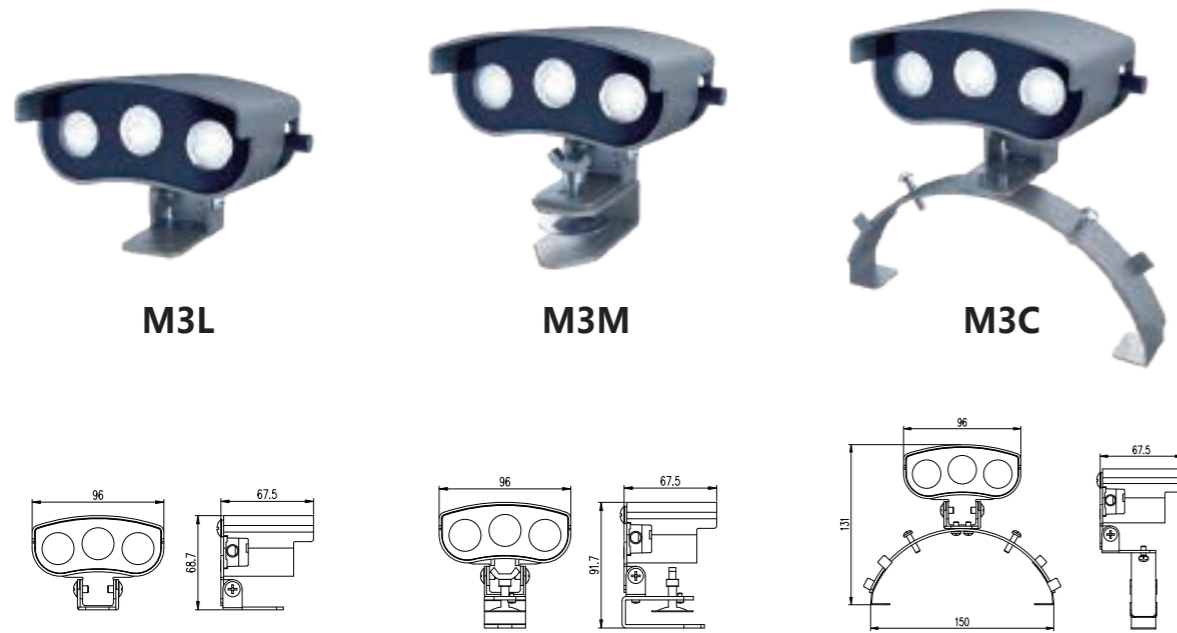

Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V

LED Qty: 3PCS

LED Brand: Cree, Lumileds, Osram

Wattage: 3W/6W/9W (White), 6W/9W (RGBW)

LED Color: R, G, B, Y, W, RGBW

Optics: 3°/10°/15°/20°/30°/45°/60°

Control: ON/OFF, DMX512

Certificate: CB CE ROHS




LED Circular Module



Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V

LED Qty: 3PCS

LED Brand: Cree, Lumileds, Osram

Wattage: 3W/6W/9W (White), 6W/9W (RGBW)

LED Color: R, G, B, Y, W, RGBW

Optics: 3°/10°/15°/20°/30°/45°/60°

Control: ON/OFF, DMX512



Certificate: CB CE ROHS



RADIANT HONOR




RH LED Wall Washer

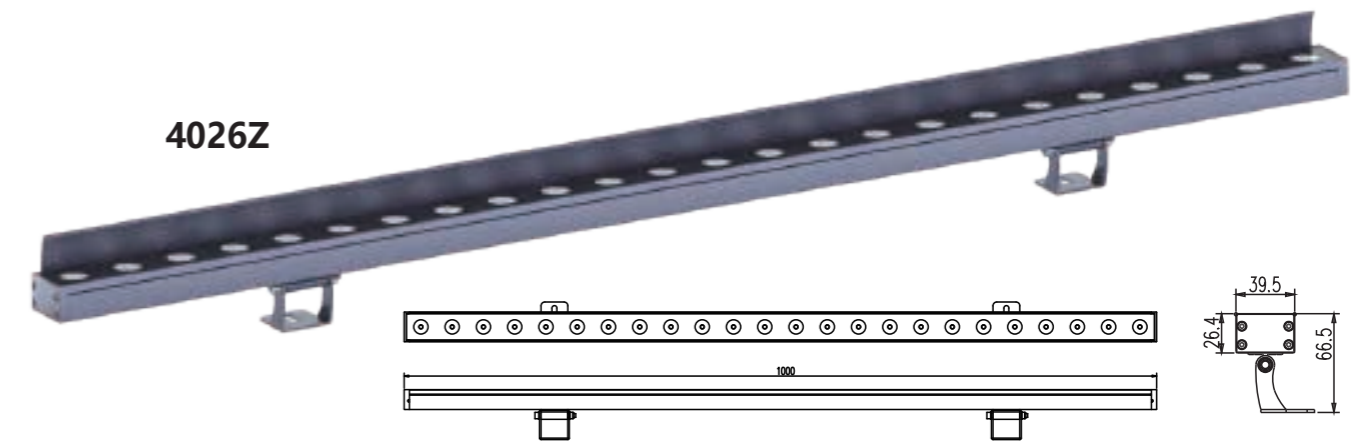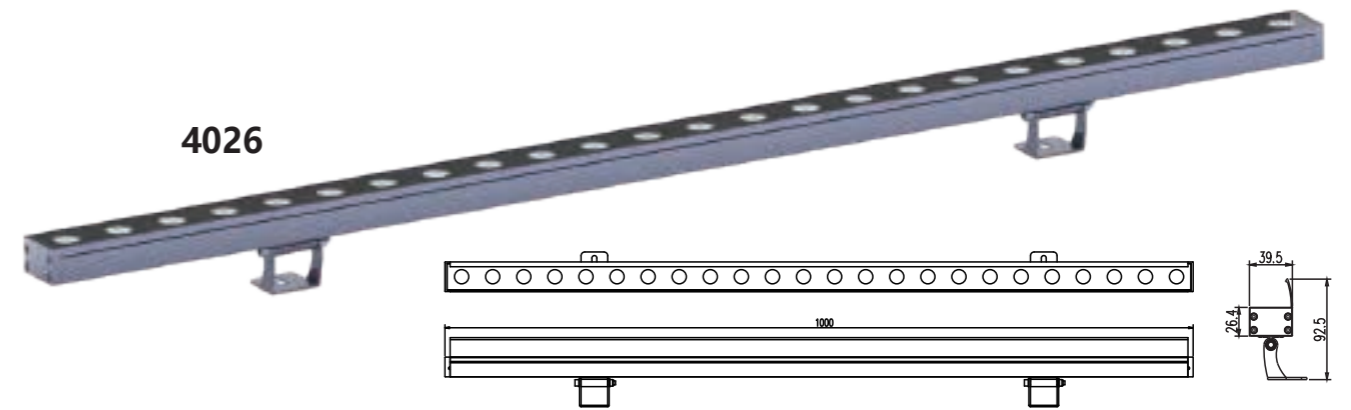

Features



- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications


Voltage: DC24V
 LED Qty: 24PCS/36PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 24W/36W (White), 24W/36W/48W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



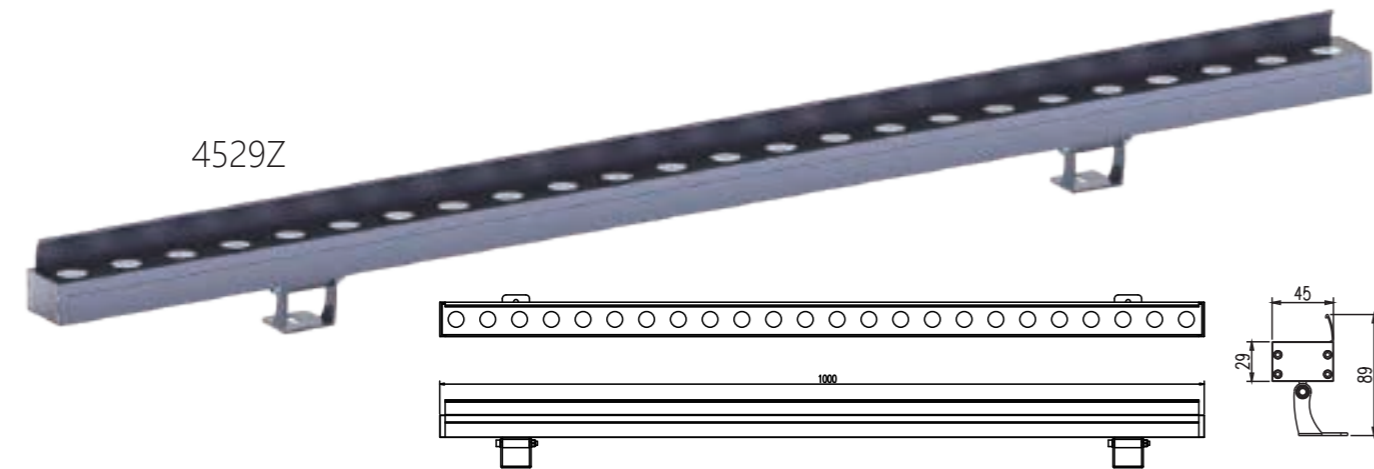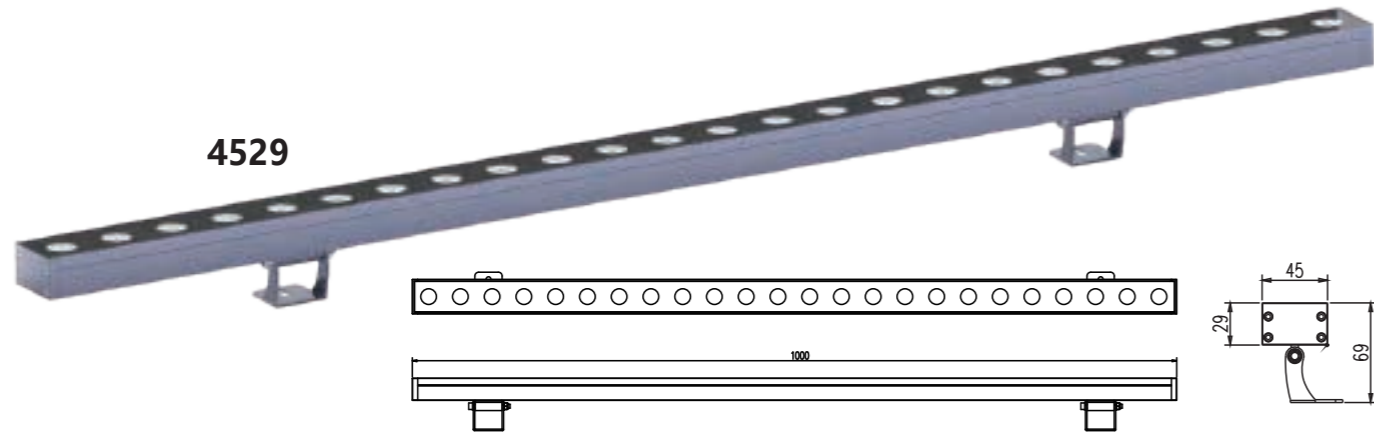



Features

- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection




Specifications

Voltage: DC24V
 LED Qty: 24PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 48W/60W (White), 60W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS

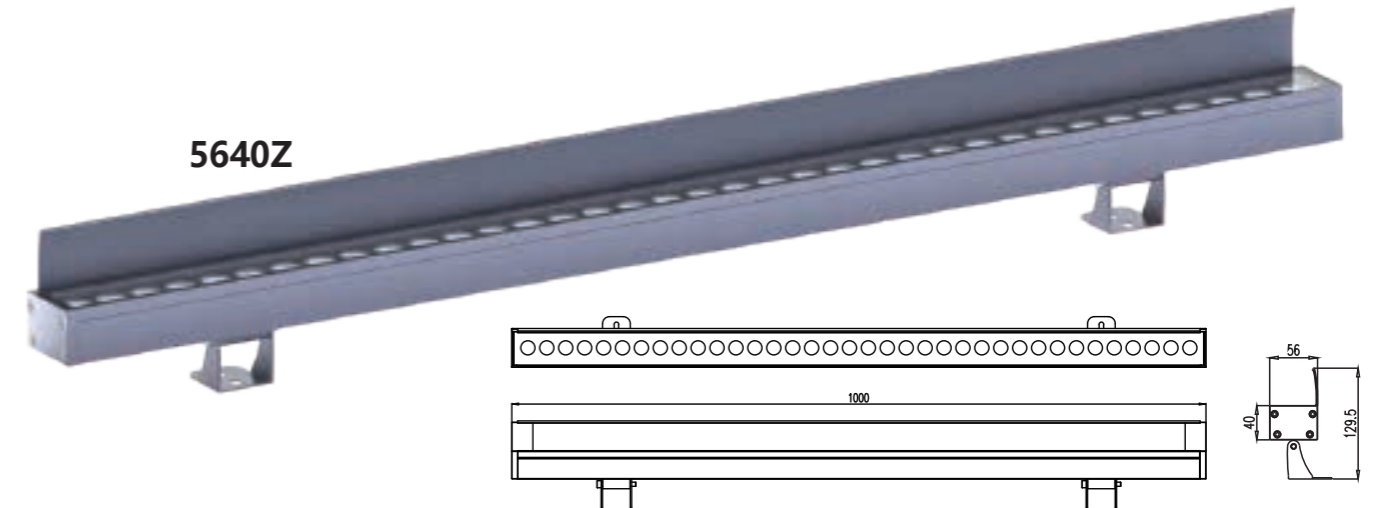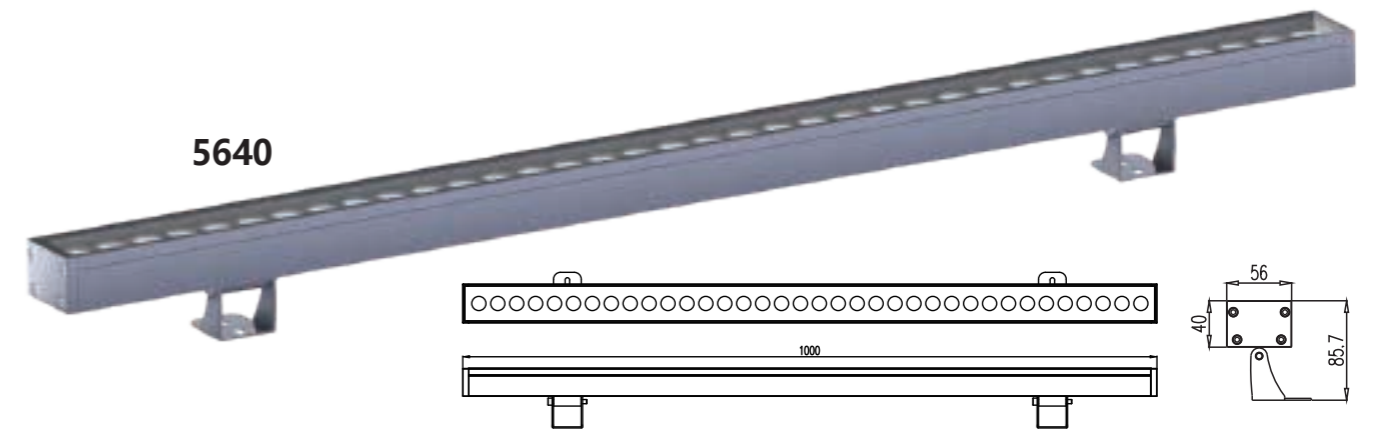

Features



- Private molding landscape & architectural lighting
- Die-cast aluminum housing
- UV Stabilized powder coated finish
- High efficiency, long life LEDs
- Versatile optics light distribution
- Silicon gaskets for IP66 protection



Specifications

Voltage: DC24V/AC240V
 LED Qty: 24PCS/36PCS
 LED Brand: Cree, Lumileds, Osram
 Wattage: 60W/72W (White), 72W/96W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 3°/10°/15°/20°/30°/45°/60°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



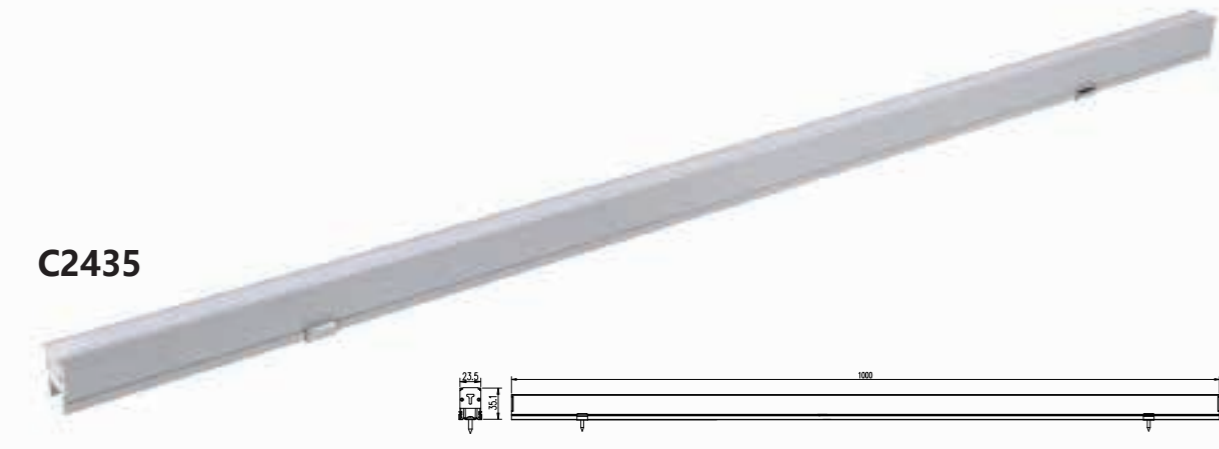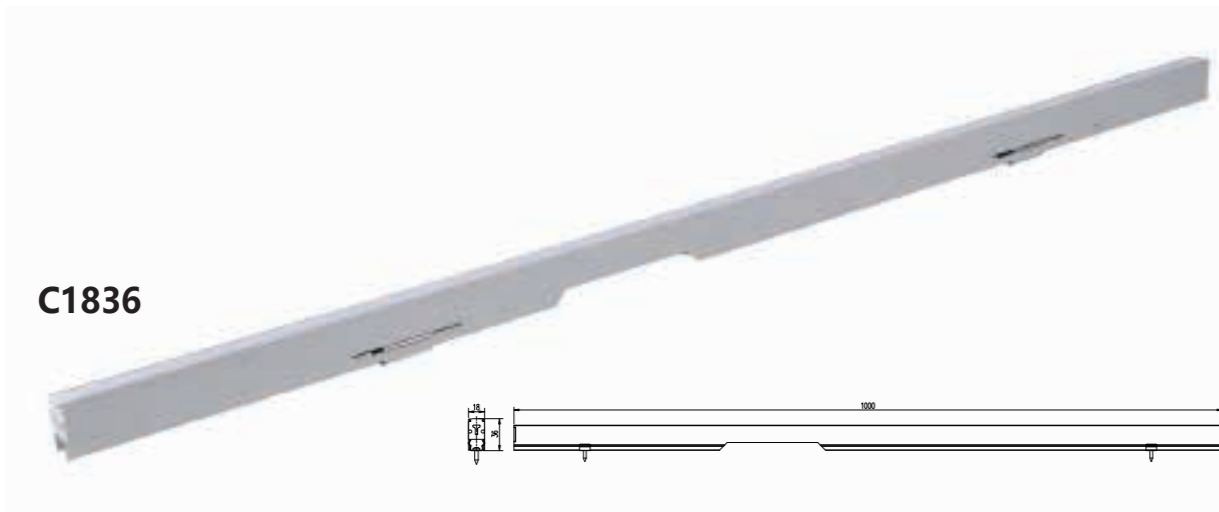



Features

- Minimalistic appearance design
- Anodizing aluminum housing
- UV resistant acrylic cover with uniform illumination
- Continuous light effect without dark spots.
- Designed for the illumination of facade lighting, cove lighting, shelf display lighting.



Specifications

Voltage: DC24V
 LED Qty: 48PCS
 LED Type: 2835 SMD / 5050 4in1
 Wattage: 12W/15W (White), 12W/15W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 120°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS

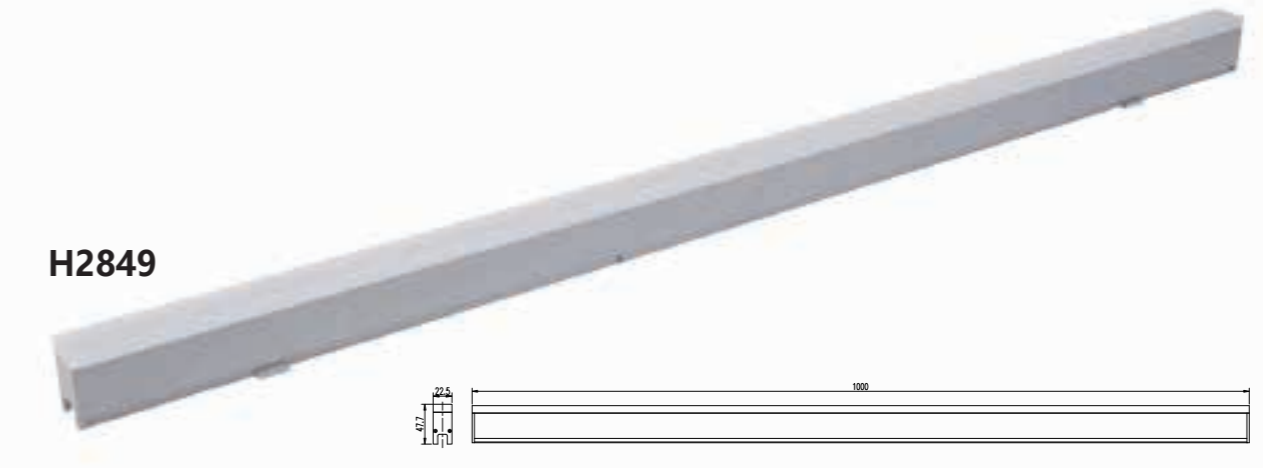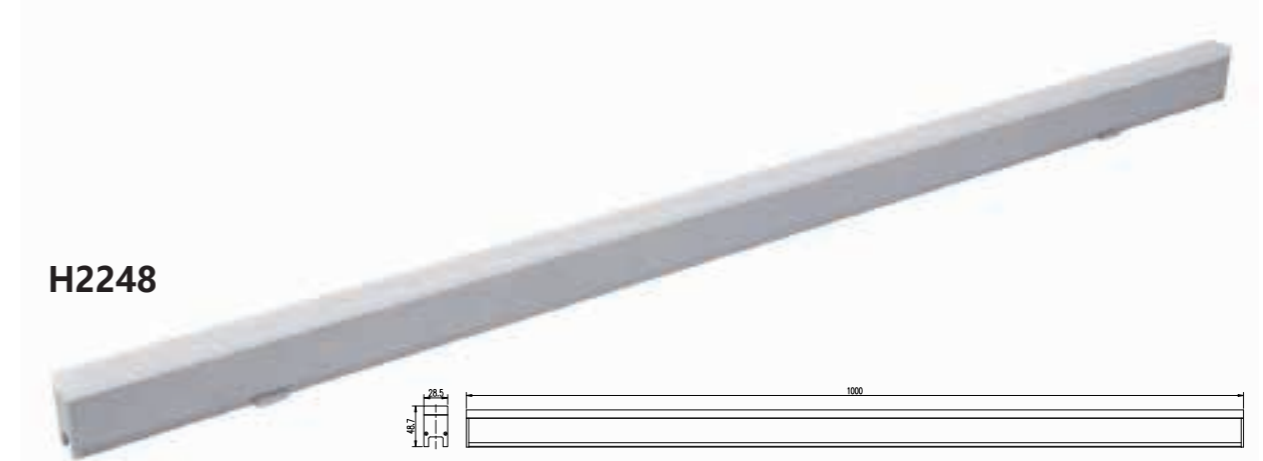

Features

- Minimalistic appearance design
- Anodizing aluminum housing
- UV resistant acrylic cover with uniform illumination
- Continuous light effect without dark spots.
- Designed for the illumination of facade lighting, cove lighting, shelf display lighting.



Specifications




Voltage: DC24V
 LED Qty: 48PCS
 LED Type: 2835 SMD / 5050 4in1
 Wattage: 12W/15W (White), 12W/15W (RGBW)
 LED Color: R, G, B, Y, W, RGBW
 Optics: 140°
 Control: ON/OFF, DMX512
 Certificate: CB CE ROHS



LED Inground Lights Series





RH LED Inground Lights MB Series

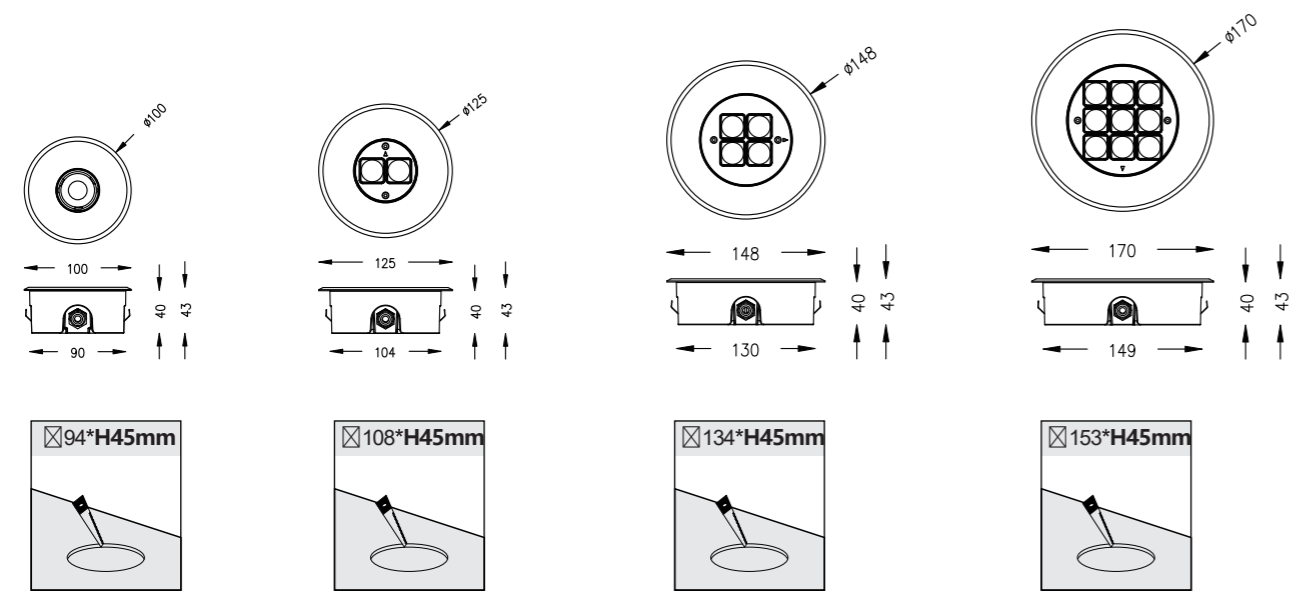



Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension & Cut-out
MB-100	3W	DC24V	6°/10°/15°/30°/45°/60°	White	1 PCS	ON/OFF DMX	Dimension: Ø100*H43mm Cut-out: Ø90*H40mm
	3-6W			RGB/RGBW			
MB-125	6W	DC24V	6°/10°/15°/30°/45°/60°	White	2 PCS	ON/OFF DMX	Dimension: Ø125*H43mm Cut-out: Ø104*H40mm
	6-9W			RGB/RGBW			
MB-150	9W	DC24V	6°/10°/15°/30°/45°/60°	White	4 PCS	ON/OFF DMX	Dimension: Ø148*H43mm Cut-out: Ø130*H40mm
	9-12W			RGB/RGBW			
MB-170	12W	DC24V	6°/10°/15°/30°/45°/60°	White	9 PCS	ON/OFF DMX	Dimension: Ø170*H43mm Cut-out: Ø149*H40mm
	12-18W			RGB/RGBW			

RH LED Inground Lights MB Series

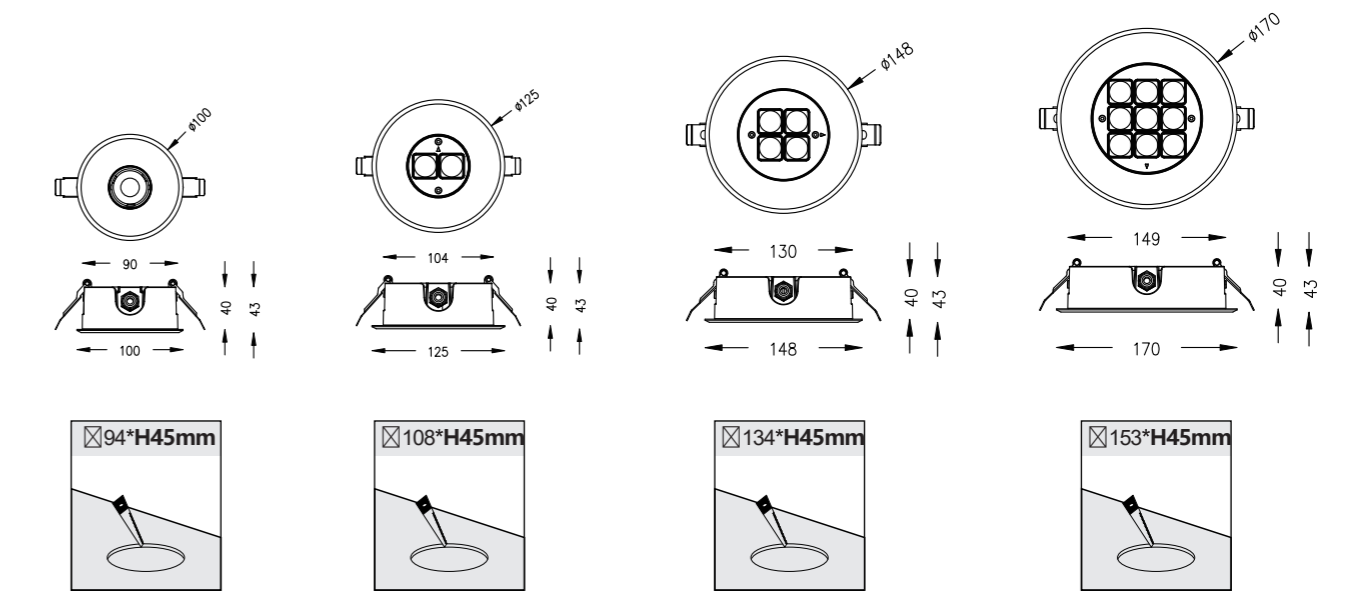

Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension & Cut-out
MB-100B	3W	DC24V	6°/10°/15°/30°/45°/60°	White	1 PCS	ON/OFF DMX	Dimension: Ø100*H43mm Cut-out: Ø90*H40mm
	3-6W			RGB/RGBW			
MB-125B	6W	DC24V	6°/10°/15°/30°/45°/60°	White	2 PCS	ON/OFF DMX	Dimension: Ø125*H43mm Cut-out: Ø104*H40mm
	6-9W			RGB/RGBW			
MB-150B	9W	DC24V	6°/10°/15°/30°/45°/60°	White	4 PCS	ON/OFF DMX	Dimension: Ø148*H43mm Cut-out: Ø130*H40mm
	9-12W			RGB/RGBW			
MB-170B	12W	DC24V	6°/10°/15°/30°/45°/60°	White	9 PCS	ON/OFF DMX	Dimension: Ø170*H43mm Cut-out: Ø149*H40mm
	12-18W			RGB/RGBW			

RH LED Inground Lights MC Series

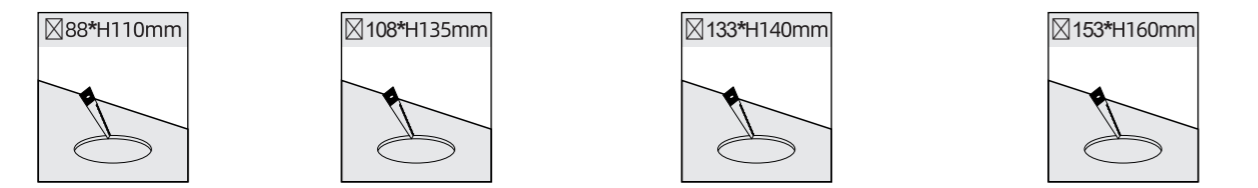
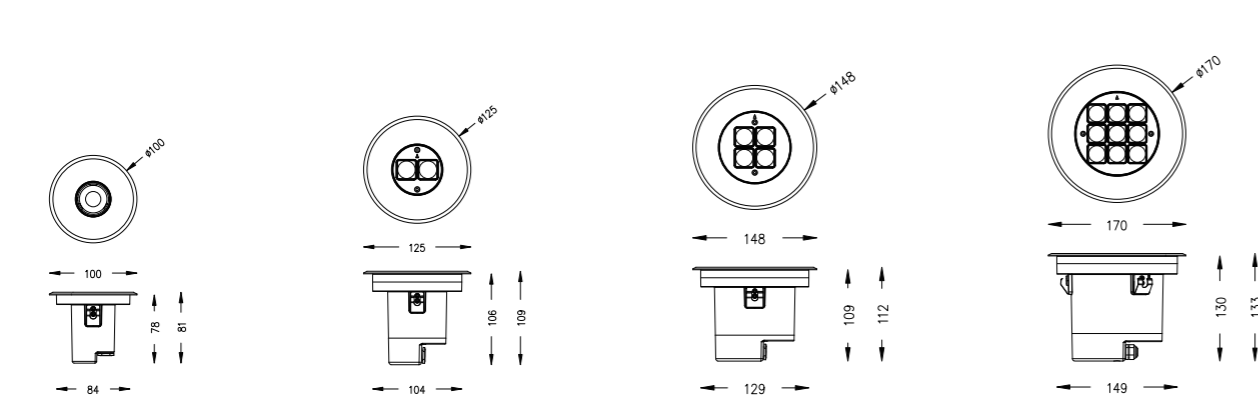


6° 10° 15° 20° 30° 45° 60°

RGBW MONO CHROME DC24V AC240V IES DMX 512 CB CE RoHS IP66 IK08

Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension & Cut-out
MC-100	3W	DC24V AC240V	6°/10°/15°/30° /45°/60°	White	1 PCS	ON/OFF DMX	Dimension: Ø100*H81mm Cut-out: Ø84*H78mm
	3-6W			RGB/RGBW			
MC-125	6-9W	DC24V AC240V	6°/10°/15°/30° /45°/60°	White	2 PCS	ON/OFF DMX	Dimension: Ø125*H109mm Cut-out: Ø104*H106mm
	12W			RGB/RGBW			
MC-150	12-15W	DC24V AC240V	6°/10°/15°/30° /45°/60°	White	4 PCS	ON/OFF DMX	Dimension: Ø148*H112mm Cut-out: Ø129*H109mm
	15-18W			RGB/RGBW			
MC-170	18W	DC24V AC240V	6°/10°/15°/30° /45°/60°	White	9 PCS	ON/OFF DMX	Dimension: Ø170*H133mm Cut-out: Ø149*H130mm
	18-21W			RGB/RGBW			

RH LED Inground Lights MC Series

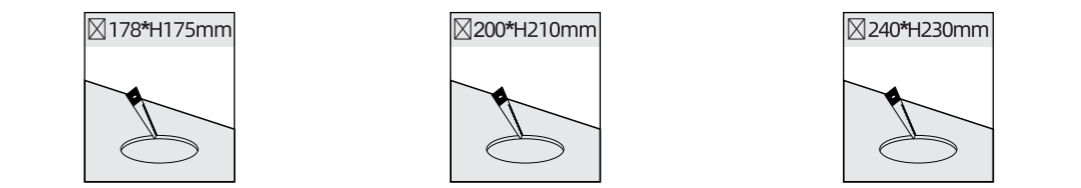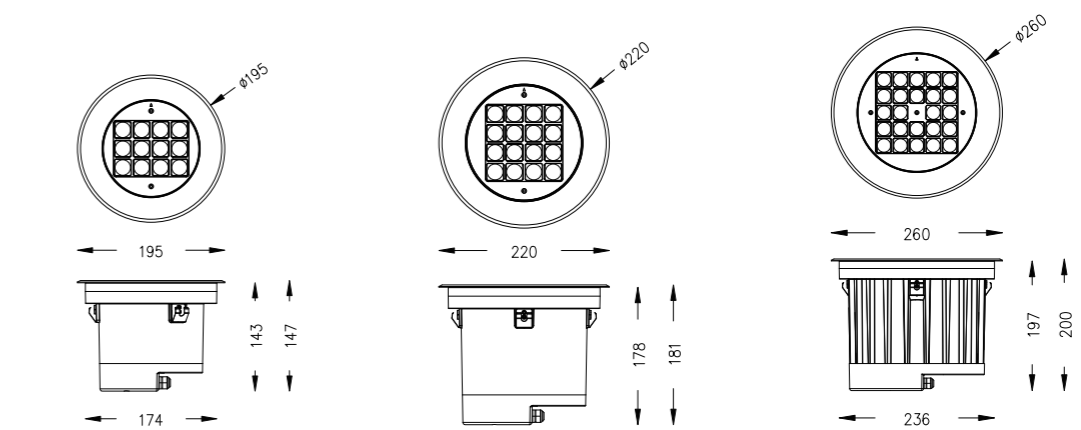

6° 10° 15° 20° 30° 45° 60°

RGBW MONO CHROME DC24V AC240V IES DMX 512 CB CE RoHS IP66 IK08

Model	Power	Voltage	Optics	LED Color	LED Qty	Control	Dimension & Cut-out
MC-195	24W	DC24V AC240V	6°/10°/15°/30° /45°/60°	White	12PCS	ON/OFF DMX	Dimension: Ø195*H147mm Cut-out: Ø174*H143mm
	24-36W			RGB/RGBW			
MC-220	36W	DC24V AC240V	6°/10°/15°/30° /45°/60°	White	16PCS	ON/OFF DMX	Dimension: Ø220*H181mm Cut-out: Ø196*H178mm
	36-48W			RGB/RGBW			
MC-260	48W	DC24V AC240V	6°/10°/15°/30° /45°/60°	White	24PCS	ON/OFF DMX	Dimension: Ø260*H200mm Cut-out: Ø236*H197mm
	48-60W			RGB/RGBW			

LED Controller

The LQ-980DW synchronous and asynchronous controller is an industrial shell with DMX512 control and 8-port output. Each port can control up to 1024 pixels (3072 channels). The controller can be widely used in architectural landscapes, hotels, supermarkets, department stores, government lighting projects, construction projects, commercial spaces, airports, subways, hospitals, and other places. It provides comprehensive technical solutions for architectural art visual dynamic color lighting for investment owners, architects, designers, professionals in flood lighting engineering, and other professionals.



Item Code	Input voltage	Power	Length	Width	Height	Fixed hole spacing
LQ-980DW	AC 220V	15W	23.60CM	13.50CM	4.50CM	7.50CM;21.84CM

Product features

1. 32–65536 level grayscale control, capable of realistically restoring image colors and details.
2. 512 level independent brightness control for three primary colors, making precise adjustment of white balance easier and more effective;
3. Hardware anti gamma correction function adjusted according to human physiological and visual characteristics;
4. The 100Hz refresh rate ensures the stability of the image;
5. Adopting Ethernet interface and UDP network protocol, with a maximum transmission distance of 100 meters;
6. The display module timely displays the controller parameters and status;
7. The controller outputs compatible TTL level signals and differential signals in dual modes;
8. Multiple chip controls are integrated, and parameters such as chip type, clock frequency, OE cycle, duty cycle, grayscale level are changed through software settings;
9. Dual network interface, capable of cascading controllers; The controller automatically detects and the software visually displays the connection status;
10. Supports DMX512AP/UCS512 driver chips and supports online addressing of control systems;
11. Each port can drive 1024 points and 3072 channels;
12. 8–port output, each port is isolated.


Installation instructions

On-line system structure

Connect with PC method (synchronized/ online mode)



Offline mode

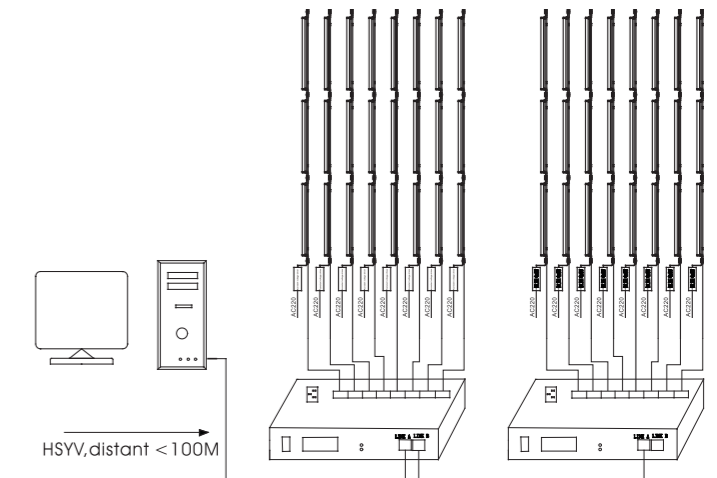

Output Interface

